


DRILLFORM

FORMING THE FUTURE OF DRILLING EQUIPMENT



BULLDOG

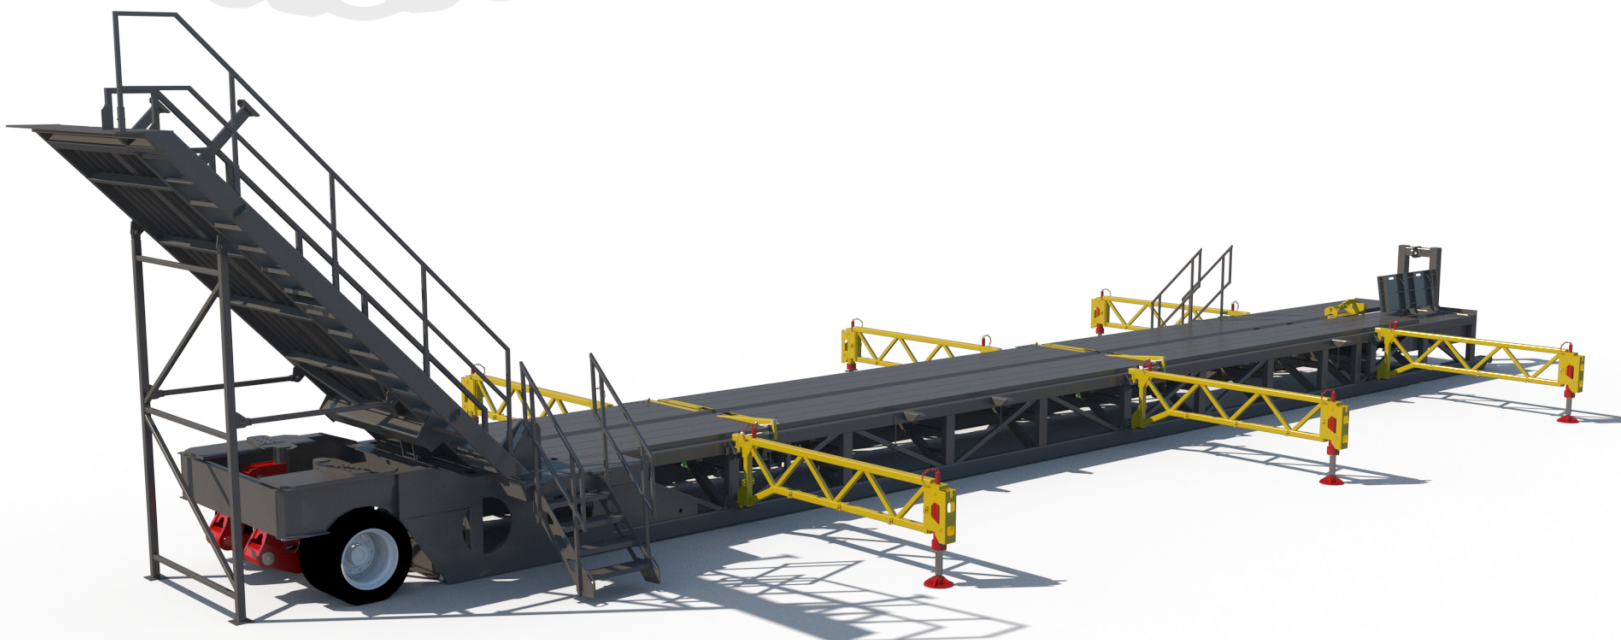

DC1200 DRILLING CATWALK

FEATURES & BENEFITS

SAFETY | Access to pipe handling pinch points and pipe movements is eliminated

COST SAVINGS | Faster cycle times, higher lift capacity, and accommodation of larger pipe diameters

EASE OF MAINTENANCE | Modular and machined components contribute to ease and speed of maintenance

OPERATIONAL ADVANTAGE | Open belly design to accommodate standard wellheads


DRILLFORM.COM | SALES@DRILLFORM.COM | +1 (403) 263 3133

BULLDOG



DC1200 TECHNICAL SPECIFICATIONS

Drillform's Bulldog DC1200 Catwalk is designed for pad-drilling and features a self-propelled walking system. An open belly design, the catwalk easily accommodates standard wellheads. A self-erecting ramp makes rigging up and down simple while automated tubular handling between the piperacks and v-door contribute to increased efficiency and safety. The DC1200 features hydraulic piperacks and a self-contained HPU.

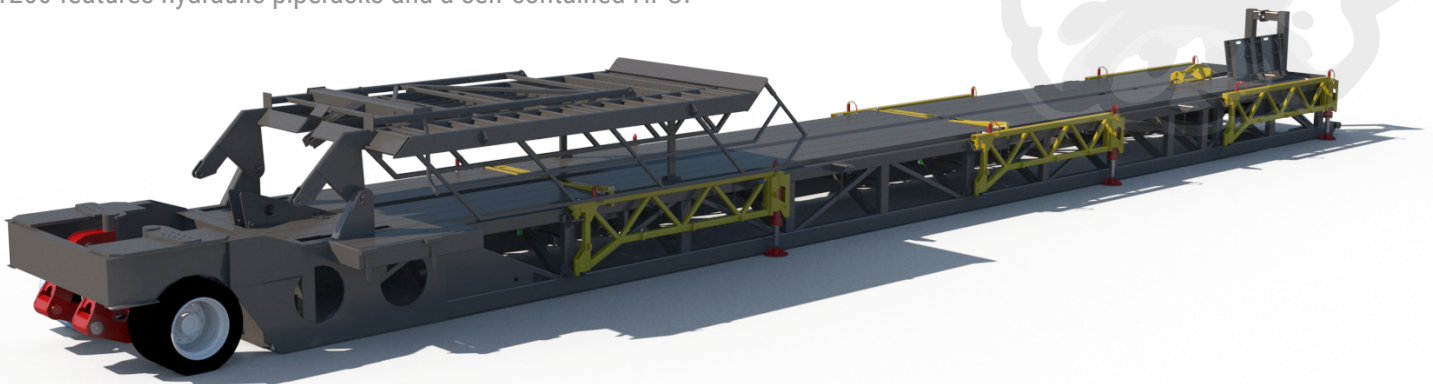

CATWALK DIMENSIONS

Sub Floor Height: 12' - 20' / 3.6 m - 6.0 m
Deck Height: 42" / 1.1 m
Four 15"/38 cm Diameter Wheels
HPU System: 75 HP - 480/600 V
Cycle Time: 18-20 seconds
Transport: 60'(L)x9'(H)x12.5'(W) / 18 m x 2.8 m x 3.8 m

ADDITIONAL OPTIONS

Wireless Remote Control
Operators Cabin
Ramp featuring 3.5'/ 1.1 m operator platform and collapsible handrails
Insulated under-deck high and low pressure lines

PIPE RACK CAPABILITIES

10,000 lbs/ 4,500 kg piperack load
Ability to accommodate Range II and Range III Tubulars
7,000 lbs / 3,175 kg per joint
Tubular Maximum Capacities up to 13 3/8" / 34 cm OD

